

Standards, Level 1 - Company Wide

# CPCC-STD-SH-40518

## Personal Protection and Cold Weather Gear

Revision 6, Change 0

Published: 04/02/2025

Effective: 04/02/2025

Periodic Review Due Date: 04/02/2030

Program: Occupational Safety and Industrial Hygiene

Topic: Occupational Safety and Industrial Health

Technical Authority: Nelson, Zayne J

Alternate Technical Authority: Steelhammer, Jacob G

Functional Manager: Foster, Andrew L

## Use Type: Administrative



USQ Facility	USQ Review	Screeners
105 KW Facility	GCX-8 (Not in Safety Basis Compliance Matrices)	Oberg, Brian D
324 Building	(Screening/Determination Performed (no issues)) 324-25-050	Garrett, Robert J
Below HazCat 3	<b>Exclusion Reason:</b> <i>N/A per Section 1.3</i>	
Canister Storage Building/Interim Storage Area	(Screening/Determination Performed (no issues)) CSB-25-031	Garrett, Robert J
Capsule Storage Area	(Screening/Determination Performed (no issues)) CSA-25-055	Garrett, Robert J
D4ES-Central Plateau	GCX-8 (Not in Safety Basis Compliance Matrices)	Griebel, Scott D
Solid Waste Operations Complex	GCX-8 (Not in Safety Basis Compliance Matrices)	Masulonis, John U
Transportation	<b>Exclusion Reason:</b> <i>N/A per Section 1.3</i>	
Waste Encapsulation Storage Facility	(Screening/Determination Performed (no issues)) WESF-25-142	Garrett, Robert J

**JHA:** Administrative  
**Periodic Review Due Date:**04/02/2030  
 Rev. 6, Chg. 0

## Change Summary

### Description of Change

No changes required.

Personal Protection and Cold Weather Gear

Published Date: 04/02/2025

Effective Date: 04/02/2025

TABLE OF CONTENTS

1.0 INTRODUCTION .....2
1.1 Purpose.....2
1.2 Scope.....2
1.3 Applicability .....3
1.4 Implementation .....3
2.0 STANDARD .....3
2.1 General Protection .....3
2.2 PPE Hazard Assessment.....4
2.3 Head Protection .....5
2.3.1 Markings.....6
2.4 Hand Protection .....7
2.5 High Visibility Safety Apparel .....7
2.6 Eye Protection.....8
2.7 Foot Protection.....9
2.7.1 General Footwear .....9
2.7.2 Substantial Footwear .....9
2.7.3 Protective Footwear .....9
2.7.4 Footwear Traction Devices .....10
2.8 Flame Resistant (FR) Clothing.....10
2.9 Arc-Rated Clothing.....10
2.10 Training .....10
3.0 FORMS .....11
4.0 RECORDS IDENTIFICATION .....11
5.0 SOURCES .....11
5.1 Requirements.....11
5.2 References.....11

List of Figures

Figure 1 – Hard Hat Date Codes .....6

List of Appendixes

Appendix A - Safety Eyewear (Safety Glasses) .....12
Appendix B - Protective Footwear (Safety Shoes/Boots) .....15
Appendix C - Examples of Acceptable Hard Hat Accessories.....17
Appendix D - Chemical Protective Clothing Guidance .....19
Appendix E - Arc-Rated Clothing.....21
Appendix F - PPE Waiver Process.....23
Appendix G - Criteria for Purchasing Cold Weather Gear (CWG) .....25

**Personal Protection and Cold Weather Gear****Published Date: 04/02/2025****Effective Date: 04/02/2025****1.0 INTRODUCTION****1.1 Purpose**

This standard establishes requirements for protecting employees and visitors from injury due to absorption or physical contact hazards. Physical hazards are commonly associated with process or environmental conditions and may require engineering controls or protective equipment such as eye and face, head, foot, hand, electrical, and general clothing. In addition, this procedure outlines the requirements for purchasing cold weather gear (CWG) for employees that work outside in cold environments.

**1.2 Scope**

The requirements in this document are based upon 29 CFR 1910, Occupational Safety and Health Standards, Subpart I, parts 132, 133, 135, 136, 137, and 138. This standard does not cover the Protective Footwear and Prescription Safety Eyewear Purchase Policy (CPCC-POL-AC-54839), or personal protective equipment (PPE) requirements relating to respiratory protection, fall protection, hearing protection, radioactive contamination, hazardous waste site work, or electrical safety (except Arc-Rated [AR] clothing).

The procurement of all CWG within CPCCo requires the use of the PPE Request Power Application. A detailed explanation of how to use this form application is provided in Appendix G.

There is a distinction between PPE and CWG. PPE are specialized items designed to mitigate risks associated with hazardous work environments (e.g., gloves, hard hats, safety footwear, etc.). Whereas CWG includes clothing meant for protection against environmental cold but is not categorized as PPE required under 29 CFR 1910, Subpart I, Personal Protective Equipment. OSHA considers CWG to be ordinary clothing used to protect against weather conditions and not required to be paid by CPCCo and therefore are not reimbursable by the government.

However, according to the American Council of Governmental Industrial Hygienists (ACGIH) Threshold Limit Values & Biological Exposure Indices, as required under 10 CFR 851.23(a)(9), Safety and Health Standards, adequate insulating dry clothing must be provided to employees whose job responsibilities require them to perform work activities in environments where air temperatures are below 40°F. The key intent for CWG purchases is to ensure workers are being protected against cold stress injuries such as trench foot, frostbite, hypothermia, etc. For more information about the specific requirements for procuring CWG, refer to Appendix G.

CWG requests can only be submitted between October 1 and March 1.

Employees/Managers must identify specific operational circumstances to determine if CWG is necessary. CWG needs must meet the following three criteria:

1. The item must be "special" and not part of the ordinary and useful furnishings an employee may be expected to provide for themselves.
2. The item must be for the benefit of the government, that is, essential to the safe and successful accomplishment of the work, and not solely for the protection of the employee.

## Personal Protection and Cold Weather Gear

Published Date: 04/02/2025

Effective Date: 04/02/2025

3. The employee must be engaged in hazardous duty.

### 1.3 Applicability

The standard is applicable to Central Plateau Cleanup Company (CPCCo) Team employees and subcontractor personnel involved with the CPCCo work scope.

### 1.4 Implementation

The standard is effective upon publication.

## 2.0 STANDARD

### 2.1 General Protection

Safety glasses with side protection, substantial footwear, long pants, and shirts with sleeves that cover the shoulder shall be worn as the minimum PPE dress code for all field work (any work outside of an office setting or anything beyond administrative work inside of an office). Work areas or activities that necessitate a reduction in the minimum PPE requirements shall be identified using a documented hazard assessment approved by the Project Director (or delegate) and Occupational Safety and Industrial Hygiene (OS&IH) Manager and submitted to the PPE Technical Authority (TA). PPE upgrades or downgrades are documented using the PPE Waiver process located in Appendix F.

Facility, area, and job-specific PPE requirements shall be communicated by briefings or postings to ensure employees, visiting personnel, visitors, and subcontractors are made aware of potential hazards.

Defective/damaged PPE shall be immediately removed from service. Reusable safety equipment shall be maintained in a clean and sanitary condition and stored in such a manner as to provide protection from damage and accumulation of dust and dirt.

Employees shall dress for the nature of their work assignments, exposure to the general work environment, and expected climatic conditions. Long hair shall be restrained, and loose-fit clothing is prohibited around moving machinery.

Protective equipment must conform to recognized standards (e.g., American National Standards Institute [ANSI]).

**NOTE:** *Minimum PPE requirements do not apply when moving from one location to another (e.g., when leaving a step-off pad after doffing anti-contamination clothing).*

## Personal Protection and Cold Weather Gear

Published Date: 04/02/2025

Effective Date: 04/02/2025

### 2.2 PPE Hazard Assessment

The minimum PPE described in Section 2.1 above may need to be supplemented or substituted depending upon specific workplace conditions. In these cases, a documented hazard assessment of work areas or of tasks within a particular work area will be completed where hazardous conditions may be present that require PPE changes to the minimum PPE. The hazard assessment shall include:

- Building location or workplace area
- Work package number, if applicable
- Name of assessor(s)
- Date(s) of the assessment
- PPE if it varies from the minimum specified requirements

The hazard assessment may be completed through any of the following: CPCC-PRO-WKM-079, Job Hazard Analysis; the project Health and Safety Plan; documented per Appendix F, "PPE Waiver Process"; or through CPCC-PRO-SH-40078, Contractor Safety Process, Appendix H, "Job Hazard Analysis Process for Subcontractors." An example of the PPE hazard assessment document is described in Appendix F.

**NOTE:** *If the JHA indicates "skill-based," the PPE waiver will be documented per the instructions in Appendix F of this standard.*

The hazard assessment shall be revised if hazard conditions of the work area change causing an upgrade or downgrade of PPE, such as a change in footwear or the addition of chemical goggles or face shield with safety glasses. PPE upgrades or downgrades are documented using the PPE Waiver process located in Appendix F.

**NOTE:** *The JHA process for subcontractors shall be in compliance with this standard for approving changes to PPE requirements.*

A reassessment for workplace hazards will be completed based on the planned startup of new processes or equipment, change in hazardous material usage, and when trend analysis identifies a pattern in PPE-related accidents/incidents, including non-usage of required PPE.

Ensure chemical and heat stress considerations are considered as part of the PPE selection.

## Personal Protection and Cold Weather Gear

Published Date: 04/02/2025

Effective Date: 04/02/2025

### 2.3 Head Protection

Employees will be provided and required to use protective headgear conforming to the specifications of ANSI/International Safety Equipment Association (ISEA) Z89.1, American National Standard for Industrial Head Protection, when working in areas where there is a potential danger of head injury due to the hazards of falling or flying objects, or electrical shock or burns.

“Bump caps” may be worn only in areas where a PPE hazard assessment verifies that head hazards are limited to "striking one's head against fixed, low-clearance objects," with no potential for injury to the head caused by electrical contact or from falling or flying objects (e.g., impact).

Head protection shall be inspected before each use. Shells shall be inspected for signs of dents, cracks, penetration, and any damage due to impact, rough treatment, or wear; inner suspension liners should be inspected closely for cracks or tears, frayed or cut straps, loss of pliability, or other signs of wear.

- Immediately replace the hard hat if the cap has been struck by a forcible blow of any significant magnitude, even if no damage is visible.
- The use of hard hat stickers may degrade the hard, plastic shell due to the chemicals contained in the adhesive. Some manufacturers prohibit the use of foil stickers due to the potential of conductivity. While the use of stickers and decals is permitted, manufacturer's recommendations must be followed. When allowed by the manufacturer, stickers should be placed at least three-fourths of an inch away from the edge of the hard hat to reduce the risk of the decal acting as a conductor between the inside and outside of the helmet. Stickers and decals should be kept to a minimum to allow for regular inspection of the helmet shell for signs of damage due to use or aging.

Field test shall be performed, in accordance with manufacturers' recommendations, to determine possible degradation of polyethylene shells.

- The manufacturer's recommendations shall be implemented for service life of the hard hat shell and suspension. The average life span is 3 to 5 years. An example of a hard hat date code is as follows (in Figure 1):

## Personal Protection and Cold Weather Gear

Published Date: 04/02/2025

Effective Date: 04/02/2025

### Figure 1 – Hard Hat Date Codes


#### Hard Hat Date Codes

The date code indicates when the hat was molded. Date codes are molded into the hat shell and they specify the following:


- Day;
- Month; and
- Year the hat or cap was molded.

The large arrow inside the "Month/Year" circle points to the month, and the two digits inside that inner circle indicate the year. The arrow inside of the "Day" circle points to day of month. Depending on what model hard hat/cap you have you may find the date code in one of two locations on the hat, on the inside of the shell or the underside front brim of the hat/cap.

**Location #1:** This example shows a cap that was molded on January 3, 2011.

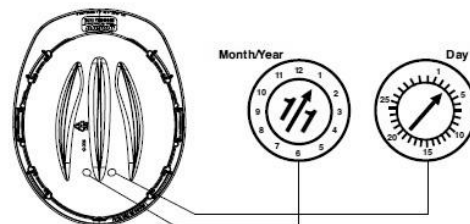

**Location #2:** This example shows a cap that was molded on March 7, 2012.

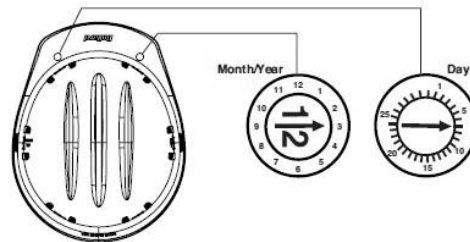

### 2.3.1 Markings


According to the ANSI/ISEA standard, hard hats must also contain user information such as instructions pertaining to sizing, care, and service life guidelines. Every hard hat conforming to the requirements of ANSI Z89.1 must be appropriately marked to verify its compliance. The following information must be marked inside the hard hat:

**NOTE:** *The Type I provides protection against impact to the top of the shell; Class C does not provide protection against contact with electrical hazards; Class G or E provides general purpose and electrical insulating properties.*

- The manufacturer's name or identifying mark
- Date of manufacture
- The legend, "ANSI Z89.1"
- The type and class designation
- The approximate head size range

**Personal Protection and Cold Weather Gear****Published Date: 04/02/2025****Effective Date: 04/02/2025**

If optional performance features are applicable, the appropriate marking(s) below must be applied in the sequence as shown:

-  - Reverse Donning
- LT – Lower Temperature
- HV – High Visibility
- HT – Higher Temperature

CPCCo employees shall use the minimum headgear when working in areas where there is a potential danger of head injury due to the hazards of falling or flying objects, or electrical shock or burns: Type I, Class C, E, or G hard hat, depending on work activities.

**2.4 Hand Protection**

Selection of the proper glove, tool, or guarding device to protect the user will be considered when working around chemical, cut, puncture, or abrasion hazards. Where multiple hazards are present, each hazard must be evaluated to determine which have the higher priorities.

- Selection of the type of hand protection is based on published product performance characteristics, degree of dexterity required to perform the work/task, and protection factor against the hazard(s) identified. REQUIRE cut, puncture, or abrasion resistant gloves whenever cut, puncture or abrasion hazards are associated with the task.
- OS&H shall perform a chemical evaluation whenever chemicals or hazardous materials are being used.
- Require chemical protective gloves and/or gauntlets when product or waste hazards are present.

**2.5 High Visibility Safety Apparel**

High-Visibility Safety Apparel (HVSA) is personal protective safety clothing that helps individuals stand out and be easily identifiable. HVSA requirements vary depending on the work environment which include:

- During daylight hours, employees who are exposed to struck-by hazards from moving vehicles or heavy equipment that are in non-roadway work areas, such as construction or demolition sites, must wear HVSA garments that are fluorescent. These work environments do not require retroreflective materials (reflective stripes) or the HVSA garments to be ANSI approved.
- Employees must wear ANSI Performance Class 2 or 3 HVSA garments, when working in lowlight work environments, in non-roadway areas where struck-by hazards from vehicles or heavy equipment exist.
- ANSI Performance Class 2 or 3 HVSA garments are also required when working in daylight and lowlight work environments where there is exposure to road traffic.

The Emergency Preparedness Drill Controller group is not required to wear HVSA garments during daylight hours near non-roadway work areas, if all vehicles and heavy equipment

**Personal Protection and Cold Weather Gear****Published Date: 04/02/2025****Effective Date: 04/02/2025**

Operators utilize a dedicated spotter. Other exceptions to HVSA requirements may be approved by a PPE waiver in accordance with Appendix F.

High-visibility garments that become faded, torn, soiled, worn, or defaced (reducing the equipment's performance) shall be removed from service and replaced.

**2.6 Eye Protection**

The minimum acceptable form of eye protection is safety glasses with side protection that meet the requirements specified in the ANSI/ISEA Z87.1, American National Standard for Occupational and Educational Personal Eye and Face Protection Devices. For the purpose of this standard, wrap-around side pieces are considered as side protection.

- Select proper safety glasses for the conditions/work environment (e.g., anti-fog safety glasses, tinted safety glasses, etc.).
- Each affected employee shall use eye and/or face protection appropriate for the work activities when exposed to flying particles, molten metal, liquid chemicals, acids or caustic liquids, chemical gases or vapors, or potentially injurious light radiation.
- Each affected employee engaged in welding activities shall use equipment with filter lenses that have a shade number appropriate for the work being performed for protection from injurious light radiation (see Appendix A).
- Prescription safety eye protection shall be ANSI/ISEA Z87.1 compliant and be fitted with side protection (i.e., side-shields or wrap-around style protection).

Additional ANSI/ISEA-Z87.1 eye and/or face protection (e.g., face shields), will be provided and shall be worn, as required by the hazard assessment per Section 2.2 and in the following cases:

- When performing grinding activities, foam-lined safety glasses and a face shield shall be worn.
- When performing cutting activities with power tools, foam-lined safety glasses or goggles shall be worn.
- When performing overhead work, and there is a potential for dust and debris, foam-lined safety glasses or goggles shall be worn.

Dark tinted glasses may not be worn inside of buildings, offices, facilities, or enclosures, except under written medical prescription and in cases where the blockage of visible light does not create a greater hazard by impeding vision. Light tinted safety glasses (amber/yellow) are authorized for use indoors.

Safety glasses are not required when wearing full-face respirators, including full-face powered air purifying respirators (PAPR). Safety glasses are required to be worn when wearing PAPRs with hoods when eye hazards are present, unless documented on a PPE waiver. Foam-lining on safety glasses is not required when worn with a PAPR hood.

**Personal Protection and Cold Weather Gear****Published Date: 04/02/2025****Effective Date: 04/02/2025****2.7 Foot Protection**

Different levels of foot protection are required depending on the work activity, location, and/or environmental conditions. Substantial footwear is the minimum requirement for field work (any work outside of an office setting or anything beyond administrative work inside of an office).

Prescribing different footwear is allowed but must be authorized in accordance with Section 2.2.

**2.7.1 General Footwear**

General footwear must fully enclose the foot. Shoes that leave the toes, heel, sides, or top of the foot exposed do not meet the requirement of general footwear. Examples of general footwear are athletic shoes, dress shoes, etc. General footwear provides minimal foot protection and is only authorized for work activities that do not have specific foot hazards identified, such as administrative tasks. Areas where general footwear is permitted include administrative areas and improved walking surfaces such as parking lots and sidewalks.

Any deviations to the general footwear requirements, such as allowing the use of open-toed shoes or heels in an administrative area (i.e., office, classroom, etc.), must be approved by the responsible director of the facility and documented on a PPE waiver per Appendix F of this standard. Additional consideration should be made in the PPE waiver for locations, such as outside staging or parking areas, that may have uneven surfaces or in gravel.

Company-provided traction devices must be used with general footwear during adverse weather conditions of snow or ice. Refer to Section 2.7.4, "Footwear Traction Devices," for more information.

**2.7.2 Substantial Footwear**

Substantial footwear must be made of sturdy construction (leather or equally firm material) that fully encloses the foot with a semi-rigid non-slip (slip-resistant) sole that has a well-defined traction pattern. Substantial footwear with ankle support may be required by the hazard analysis. Substantial footwear is the minimum requirement for all field work (any work outside of an office setting or anything beyond administrative work inside of an office setting).

Athletic shoes are not considered substantial footwear.

**2.7.3 Protective Footwear**

Protective footwear, also known as safety-toe footwear, is made of sturdy construction (leather or equally firm material) that fully encloses the foot with a semi-rigid non-slip (slip-resistant) sole that has a well-defined traction pattern and has a protective (metal or composite) toe. The footwear shall meet the specifications in the American Society of Testing Material (ASTM) International Standard, ASTM F2413, Standard Specification for Performance Requirements for Protective (Safety) Toe Cap Footwear.

Protective footwear is required to be worn in areas where there is a potential of foot injury due to falling or rolling objects, objects piercing the sole, or when the use of protective footwear will protect the affected employee from an electrical hazard, such as static discharge or electrical shock hazard, that remains after taking other necessary protective measures. Additionally protective footwear shall be worn during the routine handling of hard-edged/solid objects, near

**Personal Protection and Cold Weather Gear****Published Date: 04/02/2025****Effective Date: 04/02/2025**

or above waist level, that have the potential for falling onto the feet. Protective footwear is required when working in areas where there are construction or demolition-related work activities being performed.

For further information related to protective footwear, see Appendix B.

**2.7.4 Footwear Traction Devices**

Employees shall review the manufacturer's user's instructions on all footwear traction devices prior to use to ensure they are used correctly. Some traction devices may have certain limitations to prevent additional hazards, such as avoid using them indoors on tile, driving vehicles, climbing ladders, etc.

The following shall be utilized at a minimum where snow or ice is present on walking-working surfaces:

- Traction devices must be used over general footwear.
- Substantial or protective footwear without the use of traction devices is acceptable to access office areas or work locations.
- Traction devices are required over all footwear while performing work in areas that have not been cleared of snow or ice.

**2.8 Flame Resistant (FR) Clothing**

Flame resistant (FR) defines the property of a material whereby combustion is prevented, terminated, or inhibited following the application of a flaming or non-flaming source of ignition, with or without subsequent removal of the ignition source.

FR clothing manufacturers use non-conductive fabrics and components that will not melt onto the skin, keeping the extent of a burn injury to the minimum. FR jackets, shirts, and pants can provide the thermal insulation needed to protect the wearer from extreme heat. Quality FR clothing also resists breaking open, which prevents the wearer's skin from becoming exposed to hazards. Electrical work is an example of a task that requires the use of FR clothing for protection.

**2.9 Arc-Rated Clothing**

Arc-rated (AR) clothing is to be worn during work activities that have the potential to expose workers to an arc flash. Appendix E describes the procurement process for CPCCo employees. AR clothing shall meet the requirements in DOE-0359, Hanford Site Electrical Safety Program. DOE-0359 requires compliance with NFPA 70E, Standard for Electrical Safety in the Workplace.

AR clothing used for welding and cutting may be different than what is listed in Appendix E. Specific clothing may be needed which provides additional protection for these operations.

**2.10 Training**

General PPE training is provided in the Hanford General Employee Training under Personal Safety and refreshed on an annual basis. Personnel also review the General and applicable Craft Hazard Analyses on an annual basis.

**Personal Protection and Cold Weather Gear**

Published Date: 04/02/2025

Effective Date: 04/02/2025

**3.0 FORMS**

None

**4.0 RECORDS IDENTIFICATION**

None

**5.0 SOURCES****5.1 Requirements**

10 CFR 851, *Worker Safety and Health Program*

29 CFR 1910, *Occupational Safety and Health Standards*

29 CFR 1926, *Safety and Health Regulations for Construction*

ASTM F2413, *Standard Specification for Performance Requirements for Protective (Safety) Toe Cap Footwear*

ANSI/ISEA 105, *Hand Protection Selection Criteria*

ANSI/ISEA Z87.1, *American National Standard for Occupational and Educational Personal Eye and Face Protection Devices*

ANSI/ISEA Z89.1, *American National Standard for Industrial Head Protection Bennett Safety wear EN 388, Protective gloves against mechanical risks*

DOE-0359, *Hanford Site Electrical Safety Program*

Federal Highway Administration, *Manual on Uniform Traffic Control Devices*, 2009

NFPA 70E, *Standard for Electrical Safety in the Workplace*

Public Law 91-596, *Occupational Safety and Health Act of 1970 (General Duty Clause)*

**5.2 References**

ASTM F739, *Standard Test Method for Permeation of Liquids and Gases through Protective Clothing Materials under Conditions of Continuous Contact*

CPCC-POL-AC-54839, *Protective Footwear and Prescription Safety Eyewear Purchase Policy*

CPCC-PRO-SH-40078, *Contractor Safety Processes*

CPCC-PRO-WKM-079, *Job Hazard Analysis*

CPCC-PRO-IRM-10588, *Records Management Processes*

**Personal Protection and Cold Weather Gear****Published Date: 04/02/2025****Effective Date: 04/02/2025****Appendix A - Safety Eyewear (Safety Glasses)**

CPCCo requires that appropriate eye protection be provided to and worn by employees whose work activities expose them to eye hazards, or where eye protection use is otherwise designated. Eye protection shall meet the requirements specified in the American National Standards Institute /International Safety Equipment Association (ANSI/ISEA) Z87.1, American National Standard for Occupational and Educational Personal Eye and Face Protection Devices.

Protective eyewear shall conform to the criteria specified by ANSI/ISEA Z87.1 and be marked to indicate the impact resistance level. The BASIC IMPACT level marking is "Z87" or "Z87-2"; the HIGH IMPACT level marking includes a "+" mark/sign.

For exposure to high impact hazards, the selection and use of a HIGH IMPACT frame and lens is the standard of choice.

Ordinary prescription eyewear does not provide adequate protection from injury to the eyes from impact hazards and does not meet ANSI/ISEA Z87.1 eye protection specifications; therefore, it is the policy of CPCCo to provide protective prescription eyewear with side protection (i.e., side shields or wrap around style) to qualified active employees who need corrective lenses for vision, and whose job routinely requires the use of safety eyewear for protection.

Where prescription lenses are needed to enhance/correct vision and exposure to eye hazards exist, employees may use protective eyewear, meeting ANSI/ISEA Z87.1, that incorporates the prescription in its design or use eye protection that can be effectively worn over the prescription lenses. Contact lenses may be worn for vision correction but are not a substitute for eye protective devices and appropriate industrial safety eyewear.

To ensure worker protection, an employee may be issued non-prescription safety eyewear for use over top of their regular street-wear prescription glasses until prescription safety glasses are ordered and received.

Transition lenses may be worn, but only for employees who do not operate equipment between indoor and outdoor locations or who are not otherwise involved in activities requiring critical acuity (fast reaction to visual stimuli).

The rate at which it takes a tint change to occur in transition lenses is not instantaneous (e.g., it may take a minute for the fading process to occur) and may present a hazard to workers moving from outdoor light to areas of lower illumination (e.g., indoors).

Light tinted safety glasses are authorized for use indoors.

Indoor/outdoor glasses that meet the ANSI/ISEA Z87.1 standard are acceptable.

Non-transitional, dark tinted glasses may not be worn inside of buildings, offices, facilities, or enclosures - except under written medical prescription and in cases where the blockage of visible light does not create a greater hazard by impeding vision.

Protective eyewear equipment shall be reasonably comfortable to wear, fit snugly without interfering with the movements or vision of the wearer, and is not modified from original manufactured condition.

**Personal Protection and Cold Weather Gear**

Published Date: 04/02/2025

Effective Date: 04/02/2025

**Appendix A - (Cont.) Safety Eyewear (Safety Glasses)**

- When selecting proper safety glasses for the conditions/work environment, take into consideration the need for anti-fogging, tinting, etc. to ensure the appropriate safety glasses are selected for the task to be performed.

Full-face respirators present a unique situation for employees who need prescription glasses. The use of respirator brand and model specific National Institute for Occupational Safety and Health (NIOSH)-approved glasses and mounts inside the face piece of the respirator are required. The ordering of custom prescription optical inserts that are manufacturer and NIOSH approved with the respirator will be ordered from the authorized Material Coordinator. Be sure to specify the brand and model for the tight-fitting respirator to be worn since eyeglass may not be swapped between different models and brands of respirators. When an employee must wear optical inserts as part of the face piece, the face piece and lenses shall be worn during fit testing of the tight-fitting respirator in which they are to be worn.

**1.0 TIPS FOR PROPER CARE OF SAFETY GLASSES**

**NOTE:** *Lenses may be scratch-resistant but are not scratch-proof.*

- Rinse lenses with water or use an appropriate lens cleaner prior to wiping or cleaning, as fine dirt can scratch the surface.
- Ammonia-based cleaners (e.g., Windex) can damage lens coatings.
- Do not use paper products as lens wipes; they are usually abrasive.
- Avoid handling the glasses when not in use to maintain them in proper adjustment.
- Store the eyeglasses in a protective case when not in use to prevent accidental damage.

## Personal Protection and Cold Weather Gear

Published Date: 04/02/2025

Effective Date: 04/02/2025

### Appendix A - (Cont.) Safety Eyewear (Safety Glasses)

Filter Lenses for Protection Against Radiant Energy			
Operations	Electrode Size 1/32 in.	Arc Current	Minimum* Protective Shade
Shielded metal arc welding	Less than 3	Less than 60	7
	3-5	60-160	8
	5-8	160-250	10
	More than 8	250-550	11
Gas metal arc welding and flux cored arc welding		Less than 60	7
		60-160	10
		160-250	10
		250-500	10
Gas Tungsten arc welding		Less than 50	8
		50-150	8
		150-500	10
Air carbon	(Light)	Less than 500	10
Arc cutting	(Heavy)	500-1000	11
Plasma arc welding		Less than 20	6
		20-100	8
		100-400	10
		400-800	11
Plasma arc cutting	(light)**	Less than 300	8
	(medium)**	300-400	9
	(heavy)**	400-800	10
Torch brazing			3
Torch soldering			2
Carbon arc welding			14

\* As a rule of thumb, start with a shade that is too dark to see the weld zone. Then go to a lighter shade which gives sufficient view of the weld zone without going below the minimum. In oxyfuel gas welding, cutting, or brazing where the torch and/or the flux produces a high yellow light, it is desirable to use a filter lens that absorbs the yellow or sodium line in the visible light of the (spectrum) operation.

\*\* These values apply where the actual arc is clearly seen. Experience has shown that lighter filters may be used when the arc is hidden by the workpiece.

**Personal Protection and Cold Weather Gear**

Published Date: 04/02/2025

Effective Date: 04/02/2025

**Appendix B - Protective Footwear (Safety Shoes/Boots)**

CPCCo requires protective footwear be worn by employees whose work activities expose them to the risk of foot injury during the course of their duties. Protective footwear, also known as safety-toe footwear, shall be made of sturdy construction (leather or of equally firm material) that fully encloses the foot with a semi-rigid non-slip (slip-resistant) sole that has a well-defined traction pattern, has a protective (metal or composite) toe and meets one or more of the following Foot Protection Code requirements; American Society of Testing Material (ASTM) International Standard F2413, Standard Specification for Performance Requirements for Protective (Safety) Toe Cap Footwear or ANSI (Z41-1991). Add-on protective devices (e.g., strap-on toe, foot, or metatarsal guards) may be used as a substitute for (ASTM) F2413, Standard Specification for Performance Requirements for Protective (Safety) Toe Cap Footwear, where such devices provide protection equivalent to the ANSI (Z41-1991) performance standards.

The ASTM F2413 standard covers minimum requirements for the design, performance, testing, and classification of protective footwear. Footwear certified as meeting ASTM F2413 must first meet the requirements found in the ASTM document in Section 5.1, "Impact Resistant Footwear," and Section 5.2, "Compression Resistant Footwear." Then the requirements of additional sections such as metatarsal protection, conductive protection, electric shock protection, static dissipative protection, and protection against punctures can be met.

Protective footwear can meet all the requirements of the ASTM standard or only specific elements of it, as long as it first meets the requirements for impact and compression resistance. All footwear manufactured to the ASTM specification must be marked with the specific portion of the standard with which it complies. One shoe of each pair must be clearly and legibly marked (stitched in, stamped on, pressure sensitive label, etc.) on either the surface of the tongue, gusset, shaft, or quarter lining.

**EXAMPLE:** The following are examples of ASTM code inscriptions that may be found on a piece of protective footwear:

- ASTM F2413
- F I/75/C/75/Mt75
- PR
- CS

**Line #1: ASTM F2413.** This line identifies the ASTM standard and indicates that the protective footwear meets the performance requirements of ASTM F2413.

**Line #2: F I/75 C/75 Mt/75.** This line identifies the applicable gender (M or F; here it is F) for which the footwear is intended. It also identifies the existence of impact (I) resistance, the impact resistance rating (75 foot-pounds), and compression (C) resistance (of 75 or 50 which correlate to 2500 pounds and 1750 pounds of compression, respectively). This line can also include a metatarsal (Mt) protection designation and rating (75 foot-pounds).

**Personal Protection and Cold Weather Gear**

**Published Date: 04/02/2025**

**Effective Date: 04/02/2025**

---

**Appendix B - (Cont.) Protective Footwear (Safety Shoes/Boots)**

**Lines #3 & 4: PR & CS.** These lines are used to identify footwear made to offer protection from other specific types of hazards referenced in the standard. They are used to designate conductive (Cd) properties, electrical insulation properties (EH), footwear designed to reduce the accumulation of excess static electricity (SD), puncture resistance (PR), chain saw (CS) cut resistance, and dielectric insulation (DI), if applicable.

Safety shoes/boots can be requested, and answers can be obtained by contacting the authorized Material Coordinator P-Card Holder representing the requesting employee's organization.

**Personal Protection and Cold Weather Gear**

Published Date: 04/02/2025

Effective Date: 04/02/2025

**Appendix C - Examples of Acceptable Hard Hat Accessories**

Picture	Item	Picture	Item
	Winter liner with neck protection		Winter liner with neck protection
	Winter liner		Tight fitting knit cap liner
	Do-rag/skull cap		Skull cap
	Full face stretch tube winter liner		Balaclava

Most tight-fitting fabric stocking caps (skullcaps, weld caps, winter liners, etc.) are acceptable providing that:

- The garment does not contain any metal parts or pieces.
- The garment is located below the suspension ribbons (between the user’s head and the hat’s suspension).

**Personal Protection and Cold Weather Gear****Published Date: 04/02/2025****Effective Date: 04/02/2025****Appendix C - (Cont.) Examples of Acceptable Hard Hat Accessories**

- The garment fits smoothly on the head.
- The hard hat will remain on the head with the suspension adjusted snugly.

Protective accessories such as hard hat liners, zero hoods, welder's caps, kerchiefs, and those designed by the hard hat manufacturer, to work in conjunction with the hard hat suspension, are acceptable. Baseball caps, hoodies, and similar bulky headdress are not allowed.

Protective headgear shall not be altered in any way and must be worn as designed, ensuring nothing interferes with fit or stability or interferes with the air gap existing between the hard hat suspension and shell.

**Personal Protection and Cold Weather Gear****Published Date: 04/02/2025****Effective Date: 04/02/2025****Appendix D - Chemical Protective Clothing Guidance**

The selection of the appropriate Chemical Protective Clothing (CPC) should always be preceded by an accurate hazard analysis or assessment. The hazard assessment will be the basis used in selecting the fabric, design, and method of construction. If the worker is not adequately protected from the chemical hazards found in the workplace, chemical exposure or injury may occur.

Conversely, overprotection of the worker can add undue heat burden and restrict mobility causing increased physical exertion.

The hazard assessment should include, at a minimum, the following:

- Task performed
- Duration of work activity in CPC
- Chemical exposure potential (concentration, amount, duration)
- Past performance: Has the task been performed in the past and if so, what CPC was used? Was it adequate?
- Potential damage to garment by work activity
- Single or multiple chemical exposure
- List of chemical hazards present
- State of the chemical (solid, liquid, gas) at working temperatures
- Chemical exposure hazard (inhalation or skin contact)
- Chemical(s) type: corrosive, irritant, sensitizer, carcinogen
- Effects acute/chronic
- Warning properties (signs/symptoms of exposure)
- Temperature extremes for activity
- Potential fire hazard or hot surface contact

The hazard analysis or assessment should be documented in or attached to the applicable Job Hazard Analysis document. This documentation provides the rationale for the clothing material selected.

**Personal Protection and Cold Weather Gear**

Published Date: 04/02/2025

Effective Date: 04/02/2025

**Appendix D - (Cont.) Chemical Protective Clothing Guidance****1.0 CPC SELECTION**

Since there is currently no comprehensive US standard for evaluating the performance of CPC, this responsibility falls to the industrial hygienist. The primary factors important to the development of selection criteria for CPC include:

- *Clothing integrity* – the ability of the CPC to prevent penetration or permeation by a chemical
- *Material barrier* – the effectiveness of the material and seams used in the suit construction
- *Physical durability* – the resistance to physical hazards such as, abrasion, cutting, punctures, and tears
- *Decontamination* – the ease of removal of contaminants from the suit
- *Impact on worker* – the effect on function, mobility, and comfort

The selection of the CPC for a specific activity will largely be dependent on the chemical hazard and the nature of the hazard. Manufacturers of CPC provide a wide range of materials with varying resistance to selected chemicals. Prior to selecting a CPC ensemble, the industrial hygienist should review the manufacturer's specifications to ensure it is adequately protective to the worker. CPC manufacturers provide breakthrough times for liquid/vapor chemicals for their suit materials. Breakthrough times should be of sufficient duration to complete the work activity.

For particulate hazards that pose a skin contact risk, the CPC should provide sufficient protection from particulate penetration to protect the worker.

Consideration in the selection of CPC should be given to the manufacturing process. How the seams are constructed can play a significant role in the selection process. For particulate applications where the chemical hazard is minimal, sewn seams may be adequate. For more toxic particulates where a skin exposure presents a risk to the worker or for use with some liquid, chemical bonded seams provide greater protection against penetration through the seams. For maximum seam penetration resistance, heat-sealed or double heat-sealed seams should be used.

**Personal Protection and Cold Weather Gear****Published Date: 04/02/2025****Effective Date: 04/02/2025****Appendix E - Arc-Rated Clothing**

Arc-rated (AR) clothing shall meet the requirements in DOE-0359, Hanford Site Electrical Safety Program. DOE-0359 requires compliance with NFPA 70E, Standard for Electrical Safety in the Workplace. AR clothing shall be worn by employees who have the potential to be exposed to an arc flash during work activities. AR clothing must be the outer layer of clothing. Flame resistant clothing for welding and cutting may be different than arc-rated clothing and should be specific for the tasks involved.

The procurement process for AR clothing for CPCCo employees is as follows:

- Employees requiring daily use AR clothing will receive clothing through a lease program with a vendor. The clothing will be appropriate for Arc-Flash PPE Category 2 with an arc rating of 8 cal/cm<sup>2</sup>. The number of sets per employee will be dependent on required use, work schedule and job category, i.e., Electricians on 4x10's are eligible for up to eight sets, and FWS are eligible for two sets. The actual number of sets per employee (not to exceed eight) will be determined by their managers and included in the Statement of Work (SOW).
- Employees requiring intermittent use AR clothing will receive clothing through a lease program with a vendor. The clothing will be appropriate for Arc-Flash PPE Category 2 with an arc rating of 8 cal/cm<sup>2</sup>. The number of sets per employee will be dependent on required use and job category, i.e., Instrument Technicians, Stationary Operating Engineers, and respective Field Work Supervisors, are eligible for up to two sets of clothing. The actual number of sets per employee will be determined by their managers and included in the SOW.
- Employees requiring AR winter wear will receive clothing through a lease program with a vendor. The clothing will be appropriate for Arc-Flash PPE Category 2 with an arc rating of 8 cal/cm<sup>2</sup>. The clothing required will be dependent on required use. The actual clothing items will be determined by their managers and included in the SOW.

The lease program will include laundry services.

A set of daily wear consists of:

- Long sleeve shirt and long pants, or
- Coveralls

A set of winter wear consists of a combination of:

- Zip-up hooded sweatshirt
- Insulated coat
- Insulated bib overalls

The Project Buyer's Technical Representative (BTR) for the SOW will maintain a list of employees and the approved number of sets per employee for each Project. This list will be shared with the Contract Specialist and the vendor. This list will be updated with employee changes and clothing returns. All leased AR clothing must be returned if employee leaves CPCCo. Clothing shall be returned per the SOW to the HMIS Point of Contact, not placed in the laundry.

**Personal Protection and Cold Weather Gear**

**Published Date: 04/02/2025**

**Effective Date: 04/02/2025**

---

**Appendix E - (Cont.) Arc-Rated Clothing**

Project-specific or work package-specific items for higher hazard risk category activities may be purchased by the Project with Director approval. These items will be assigned to the Project, not individuals. This includes flame resistant anti-contamination clothing used in radiological areas.

**Personal Protection and Cold Weather Gear****Published Date: 04/02/2025****Effective Date: 04/02/2025****Appendix F - PPE Waiver Process**

A PPE waiver may be granted by the project Director based on a hazard analysis of the work area and tasks to be completed. The PPE waiver is completed as a Word document, and once signed is submitted to the TA. The following is an example of a completed waiver:

EXAMPLE: 324 Mock-Up Tent PPE Exemption

- Building location or workplace area: 324 Mock-Up Tent
- Work package number: [list work package number here]
- Name of assessor(s): [list names here]
- Date(s) of the assessment: [list date here]
- Date assessment must be reevaluated and reapproved: [optional, such as one year from date listed above]
- PPE associated with the waiver request: Safety Glasses

CPCC-STD-SH-40518, Personal Protection, states: Safety glasses with side protection, substantial footwear, long pants, and shirts with sleeves that cover the shoulder shall be worn as the minimum PPE dress code for all work environments, excluding administrative office work.

Work areas or activities that necessitate a reduction in the minimum PPE requirements shall be performed using a documented hazard assessment approved by the Project Director (or delegate) and Occupational Safety and Industrial Hygiene (OS&IH) Manager and submitted to the PPE Technical Authority (TA).

The 324 Project has determined that the PPE minimum requirements at the 324 mock-up tent during 324 mock-up training activities for observers and evaluators not participating in mock-up activities warrant modification. The modification includes the following:

1. Safety glasses are not required in the 324 mock-up tent for observers and evaluators.
  - Basis: Routine work for evaluators and observers includes observing radiological donning and doffing training and simulated work activities specific to the 32408A, 32408B, and 32408C training programs that present a minimal impact hazard (this exemption is no longer applicable when any other activities are being performed within the mock-up tent). Personnel have experienced fogging issues when wearing safety glasses, therefore it has been determined that the use of safety glasses should be limited to times when impact hazards are anticipated.

**Personal Protection and Cold Weather Gear**

**Published Date: 04/02/2025**

**Effective Date: 04/02/2025**

---

**Appendix F - (Cont.) PPE Waiver Process**

I have reviewed the 324 Mock-Up Tent exemption requirements and agree that modifications to the PPE requirements is warranted.

Project OS&IH Manager

Print name

Sign

Date

---

Project Director (or delegate)

Print name

Sign

Date

---

## Personal Protection and Cold Weather Gear

Published Date: 04/02/2025

Effective Date: 04/02/2025

### Appendix G - Criteria for Purchasing Cold Weather Gear (CWG)

The DOE Worker Safety and Health Program [10 CFR 851.23(a)(9)] requires contractors to implement ACGIH TLV guidance. This guidance requires employers to provide adequate clothing to protect workers against working in cold environments (<40°F).

CPCCo managers are required to evaluate the need for CWG for employees working in a 40°F below temperature and provide justification to document the basis of CWG purchases to support allowability using the PPE Request Form – Power App. Employees/Managers will use the Power App to request all CWG purchases.

Outdoor activities that do not qualify for CWG purchases include walking from a vehicle to an office location and brief work activities lasting less than 10 minutes, unless these activities require the employee to be outside in wind chill temperatures below -15°F. Given the increased risk of frostbite at the specified TLV temperature and timeframe above, CWG may be purchased to help minimize the risk of cold stress or injuries to employees.

When submitting a request for CWG, line management or “delegate” must specify the CWG items being requested. Employee eligibility for specific CWG items must be verified before approval. However, if the employee has already received similar clothing as a PPE item that CWG request would be denied unless it can be adequately justified (i.e., new or different risk for CWG is warranted).

Line management (or delegate) must provide a detailed description of the work activities and the environment necessitating CWG in the request. This should include sufficient CWG to ensure frostbite and hypothermia protection of the employee based on the strenuousness of their work activities.

**NOTE:** *It is CPCCo expectation that company provided CWG are not to be worn offsite for personal activities.*

Line management will review and provide approval on all CWG requests in the PPE Request Form – Power Apps that meet the requirements of this procedure. In addition, the controller or designate will serve as second approval on CWG requests.

The following limitations apply to the purchasing of CWG items:

- Employees are eligible to receive only one of each type of CWG item.
- CWG is expected to remain functional for the listed wear life of the item —see CWG Catalogue.
- CWG will not be replaced if lost. The cost for replacement is the responsibility of the employee.
- The replacement frequency for CWG may be applied only when the CWG shows significant wear-and-tear to necessitate replacement.
- The employee must not have already been bought other similar clothing items that can be used to protect them against the cold environment. (For example, if a snowplow operator is already provided with a high visibility winter jacket, then no additional heavy jacket for performing this task should be necessary).

**Personal Protection and Cold Weather Gear**

**Published Date: 04/02/2025**

**Effective Date: 04/02/2025**

---

**Appendix G - (Cont.) Criteria for Purchasing Cold Weather Gear (CWG)**

An explanation for justification of early purchase must be provided within the Power App and eBOM Comments or Special Instructions Field.

**EXCEPTION 1**

Early replacement of CWG will be covered by CPCCo (with manager approval) for items that have been damaged or show excessive signs of wear that affect the functionality of the item because of a task-related incident(s) occurring during the course of job performance or items that contain manufacturer's defects and failures.